

UNKA
SOUND SYSTEMS



Unique Audio Solutions



MIK123P
PASSIVE MONITOR

MIK123 passive is our stage monitor. Designed to deliver high sound pressure, controlled horizontal directivity and extraordinary low frequency response packed in low-profile esthetics.


PRODUCT DESCRIPTION:

Our stage monitor MIK123 is two-way passive monitor that contains one 12" Neodymium speaker and 1,4" HF driver mounted in 60°x 40° horn. It delivers very high sound pressure maintaining clear sound and controlled horizontal directivity.



TECHNICAL SPECIFICATIONS MIK 123P

Dimensions

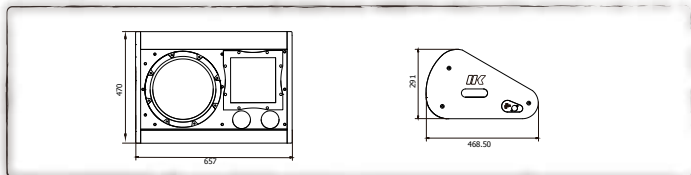

COLORS & PREMIUM FINISHES AVAILABLE



Black



White



Custom

ACOUSTICS

SPEAKER HANDLING	1.080w 8 Ohm
MAXIMUM AMPLIFIER POWER	2.000w program
OPERATING FREQUENCY RANGE	50 Hz - 19 KHz
MAXIMUM SPL	124 dB CONTINUOUS - 130 dB PEAK

COVERAGE

HORIZONTAL	40°
VERTICAL	60°

CROSSOVER

FREQUENCY	1.200 KHz
-----------	-----------

TRANSDUCERS

LOW - MID FREQUENCY	1 x 12" x 1.000w NEODYMIUM
HIGH FREQUENCY	1 x 2,5" x 80w NEODYMIUM

AUDIO INPUT

WIRING	PIN1+ = CH1+ / PIN1- = CH1- / PIN2+ =N.C. / PIN2- = N.C.
--------	--

POWER INPUT

CONNECTORS	2 x SPEAKON IN / OUT
------------	----------------------

PHYSICAL

DIMENSIONS	57,9 x 25,3 x 17,8 cm (22,80" x 9,96 x 7")
WEIGHT	15 Kg (33,07 lb)